

LABEL INFORMATION

(1)

IMPORTANT BREAK-IN INSTRUCTIONS
To ensure proper vehicle performance, you must follow the recommendation in the owner's manual regarding break-in maintenance at 800km(500mi) and break-in operation up to 1,600km(1,000mi).

56040-1008

TE03057CN9 C

(2)

TIRE AND LOAD DATA			
The stability and handling characteristics of this motorcycle could become unsafe by the use of improper tire inflation pressures, overworn tires, unsuitable replacement tires, or overloading. When tire tread wears down to the limit, replace the tire with only the standard tire. Maintain the inflation pressure specified.			
	Air Pressure (Cold)	Size & Make Type	Minimum Tread Depth
Front	Up to 185kg Load (364 lbs)	150 kPa (1.50kg/cm ² /1psi)	2 mm (0.08 in)
	Up to 175kg Load (325 lbs)	150 kPa (1.50kg/cm ² /1psi)	
Rear	Up to 195kg Load (391 lbs)	175 kPa (1.75kg/cm ² /1.25psi)	2 mm (0.08 in)
	Up to 185kg Load (364 lbs)	175 kPa (1.75kg/cm ² /1.25psi)	

56053-1076

TE03058C S

144 LABEL INFORMATION

(3)


IMPORTANT DRIVE CHAIN INFORMATION

To prevent an accident and/or damage to the motorcycle, the drive chain must be properly maintained. It should be lubricated every 600km(400mi) and adjusted as often as necessary to keep chain slack at about 35~55mm(1.4~2.2in)measured midway between sprockets on the lower chain run with the motorcycle on the side stand. The standard chain is an Enuma EK520LV0 with estimated service life of 10000~40000km(6,200~25,000mi), depending on the severity of use and the frequency of lubrication and adjustment. For safety, replace the chain with only the standard chain any time it wears to over 323mm(12.7in), measured over a 20-link portion pulled straight with 10kg of tension. See the Owner's Manual for chain information.

56033-1364

TE03059CZ5 C

(4)


VEHICLE EMISSION CONTROL INFORMATION	
ENGINE FAMILY CODE -----	_____
PERMEATION FAMILY -----	_____
MODEL(S) -----	_____
EXHAUST EMISSION CONTROL SYSTEM -----	_____
TUNE UP SPECIFICATIONS	
IGNITION TIMING	10° BTDC AT 1300 RPM
IDLE SPEED	1300 ± 50 RPM IN NEUTRAL
IDLE AIR FUEL MIXTURE SETTING	NO ADJUSTMENT
VALVE CLEARANCE (ENGINE COLD)	INTAKE : 0.10-0.19 MM (0.0039-0.0075 IN) EXHAUST : 0.14-0.23 MM (0.0055-0.0091 IN)
SPARK PLUG	CR8E(NGK), U24ESR-N(DENSO) SPARK PLUG GAP : 0.7-0.8 MM (0.028-0.031 IN)
FUEL	GASOLINE WITH RESEARCH OCTANE NO. (RON) 91 MIN.
ENGINE OIL	SERVICE RATING: API SE, SF OR SG API SH, SJ, SL OR SM WITH JASO MA, MA1 OR MA2 VISCOSITY : SAE 10W-40 SEE THE OWNER'S MANUAL FOR ENGINE OIL INFORMATION.
THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO XXXX MODEL YEAR NEW MOTORCYCLES. KAWASAKI HEAVY INDUSTRIES, LTD.	
	

59464-1685

TE03061C29 C

146 LABEL INFORMATION



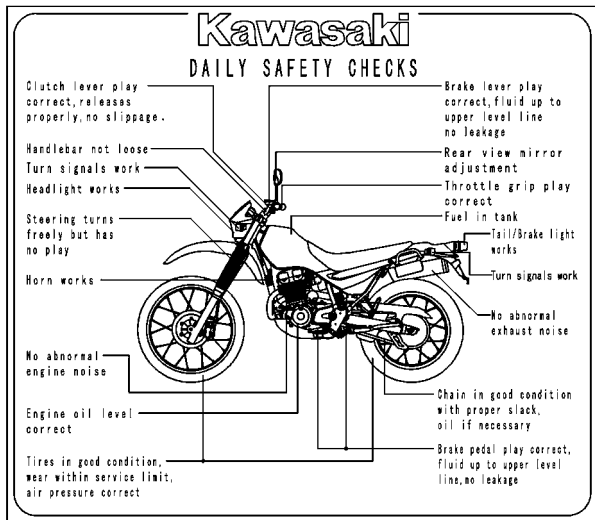



(5)



56033-1088

TE03060C29 C

(6)

⚠ DANGER/POISON		
 <p>SHIELD EYES EXPLOSIVE GASES CAN CAUSE BLINDNESS OR INJURY</p>	 <p>NO • SPARKS • FLAMES • SMOKING</p>	 <p>SULFURIC ACID CAN CAUSE BLINDNESS OR SEVERE BURNS</p>
<p>FLUSH EYES IMMEDIATELY WITH WATER</p> <p>GET MEDICAL HELP FAST</p> 		
KEEP OUT OF REACH OF CHILDREN		
<p>IN U.S.A., YUASA INC. SERVICED BY : READING, PA. 19612</p>		
		
 <p>RECYCLE Pb</p>		

148 LABEL INFORMATION

(7)

ENGINE OIL AND OIL FILTER

Engine Oil Change--when filter is not removed: 1.3 liters(1.4 US qt)
when filter is removed: 1.4 liters(1.5 US qt)

Engine Oil Type: API SE, SF or SG
: API SH or SJ with JASO MA
SAE 10W-40

See Owner's Manual for engine oil / filter information and change intervals.

56033-1370

TE03082CZ5 C

 WARNING

Engine exhaust, some of its constituents, and certain vehicle components contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

NOTICE

THIS PRODUCT HAS BEEN MANUFACTURED FOR USE IN A REASONABLE AND PRUDENT MANNER BY A QUALIFIED OPERATOR AND AS A VEHICLE ONLY.

(8)/(9)

USE ONLY DOT3 OR 4 BRAKE
FLUID FROM A SEALED CONTAINER.
CLEAN FILLER CAP
BEFORE REMOVING.
WARNING
UTILISER DU LIQUIDE
DE FREIN DOT3 OU 4.

TE03792BN9 C

(11)

MFD. BY KAWASAKI HEAVY INDUSTRIES, LTD.
DATE: THIS VEHICLE CONFORMS
TO ALL APPLICABLE FEDERAL MOTOR VEHICLE
SAFETY STANDARDS IN EFFECT ON THE DATE
OF MANUFACTURE SHOWN ABOVE.
GVWR 646 LBS. GAWR F 206 LBS. WITH 2.75
-21 45P TIRE, J21X1.50 RIM, AT 21 PSI.
COLD. GAWR R 440 LBS. WITH 4.10-18 59P
TIRE, J18X2.15 RIM, AT 25 PSI. COLD.
JKAKLMG1XXXXXXXXXX
MOTOR CYCLE (KL250G) MADE IN JAPAN

59464-1237

TE03063CN9 C

(10)

MOTORCYCLE NOISE EMISSION CONTROL INF.

THIS XXXX MOTORCYCLE MEETS EPA NOISE EMISSION
REQUIREMENTS BY THE FEDERAL TEST PROCEDURE.
MODIFICATIONS WHICH CAUSE THIS MOTORCYCLE TO
EXCEED FEDERAL NOISE STANDARDS ARE PROHIBITED
BY FEDERAL LAW. SEE OWNER'S MANUAL. (KL250G)
MODEL SPECIFIC CODE:KAW3970250
SEE VEHICLE IDENTIFICATION NUMBER ON STEERING HEAD
NOISE LIMIT/CLOSING RPM:80DBA/7126RPM

59464-1686

TE03064CN9 C

KL250G9



KAWASAKI HEAVY INDUSTRIES, LTD.
Consumer Products & Machinery Company

Part No. 99987-1565

Printed in Japan